


Timers Interval Type EBS

CARLO GAVAZZI



SCREW

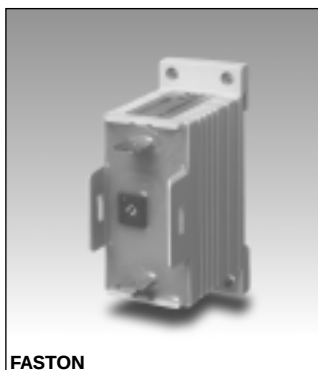

FASTON

- Fail-safe two-wire connection
- Low-cost
- Multi-voltage: 24-230 VAC
- Interval timer
- Time range: 0,5 s - 10 m
- Knob-adjustable time setting
- Output: SCR 10-500 mA (screws) and SCR 10-700mA (Fast-ON)
- For mounting on DIN-rail in accordance with DIN/EN 50 022
- 22,5 mm small Euronorm housing

Product Description

Small, low cost monofunction timer with adjustable time setting. 2-wire connection for easy and fail-safe use (see diagram). For mounting on DIN-rail or

directly on surface by screw. The timer is used e.g. with industrial relays or 3-phase contactors.

Ordering Key

EBS S M23 10S F

Housing	_____
Function	_____
Small E-line	_____
Output	_____
Power supply	_____
Time range	_____
Fast-ON connection	_____

Type Selection

Mounting	Output	Time range	Connection	Supply: 24 - 230 VAC
For DIN-rail or for screw	SCR	0.5 - 10 s	Screws	EBS S M23 10S
	SCR	0.1 - 1 m	Screws	EBS S M23 1M
	SCR	1 - 10 m	Screws	EBS S M23 10M
For DIN-rail or for screw	SCR	0.5 - 10 s	Fast-ON	EBS S M23 10S F
	SCR	0.1 - 1 m	Fast-ON	EBS S M23 1M F
	SCR	1 - 10 m	Fast-ON	EBS S M23 10M F

Time Specifications

Time ranges	
10 s	0.5 - 10 s
1 m	0.1 - 1 m
10 m	1 - 10 m
Time range accuracy	Max. setting: actual time ≥ max. set time min. setting: actual time ≤ min. set time
Repeat accuracy	≤ 0.2%
Time variation	
Within rated power supply and ambient temperature	≤ 0.1%/V ≤ 0.2%/°C
Reset	
Time and output	Power supply interruption ≥ 200 ms

Output Specifications

Output	SCR
Output current	
Maximum load current (screw terminals)	500 mArms
(Fast-ON connection)	700 mArms
Minimum load current	10 mArms
Leakage current	≤ 3.5 mArms @ 230 VACrms typ.: 2 mArms
Voltage drop	≤ 8 VACrms typ.: 5 VACrms @ 50 mArms

Supply Specifications


Power supply	Overvoltage cat. III (IEC 60664) (IEC 60038)
Rated operational voltage	24-230 VAC, -10/+15%
Rated insulation voltage	None



Caractéristiques générales

EMC	Electromagnetic Compatibility Acc. to IEC 60801-4 Acc. to IEC 60801-5	Weight	50 g
Immunity		Dimensions	Screw terminals 22.5 x 56 x 49 mm Fast-ON connection 22.5 x 56 x 44 mm
Power ON delay	≤ 100 ms	Approvals	UL, CSA (screw terminals only)
Power OFF delay	≥ 200 ms	CE Marking	Yes
Environment	Degree of protection Pollution degree Operating temperature Storage temperature		
	IP 20 3 -20° to +50°C (-4° to +122°F) -30° to +80°C (-22° to +176°F)		

Wiring Diagram

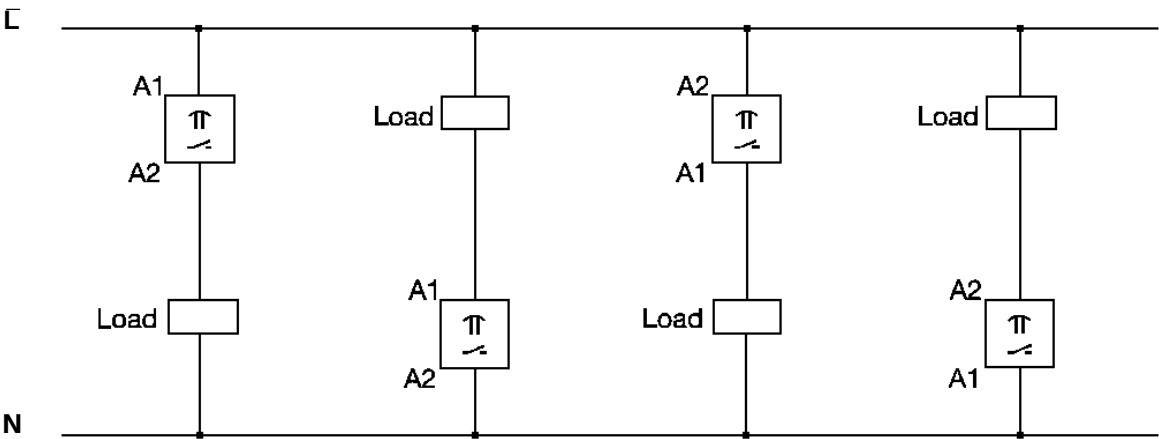

Operation Diagram



Dimensions

