

MAIN FEATURES

Hollow shaft $\varnothing$ 48 mm encoder series recommended for motor feedback.

- 3 channel encoder (A / B / Z) up to 2048 ppr
- Power supply up to +24 V DC with several electrical interfaces available
- Up to 150 kHz output frequency
- Cable output, connector available on cable end
- Through hollow shaft diameter up to 8 mm
- Mounting by stator coupling



ORDERING CODE

EL 48C 500 S 5 L 8 X 6 PR .XXX

SERIES
incremental encoder series **EL**

MODEL
blind hollow shaft **48C**
through hollow shaft **48P**

RESOLUTION
ppr from **100** to **2048**
see table for pulses availability

ZERO PULSE
without zero pulse **S**
with zero pulse **Z**

POWER SUPPLY
(with L electrical interface) 5 V DC **5**
8 ... 24 V DC **8/24**

ELECTRICAL INTERFACE
NPN open collector **C**
push-pull **P**
line driver **L**

BORE DIAMETER
mm **6**
mm **8**


ENCLOSURE RATING
IP 40 **X**

MAX ROTATION SPEED
6000 rpm **6**

OUTPUT TYPE
radial cable (standard length 0,3 m) **PR**
preferred cable lengths 2 / 3 / 5 / 10 m, to be added after OUTPUT TYPE (eg. PR5)

VARIANT
custom version **XXX**

48 C / P

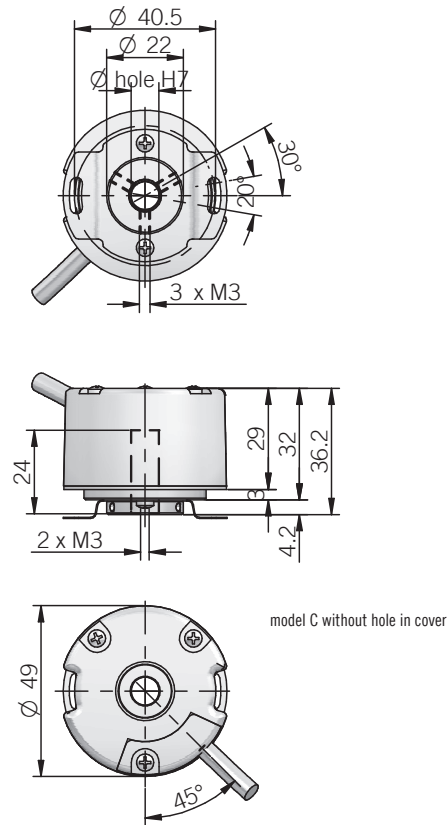

dimensions in mm

ELECTRICAL SPECIFICATIONS

Resolution	from 100 to 2048 ppr
Power supply	5 = 4,5 ... 5,5 V DC 8/24 = 7,6 ... 25,2 V DC
Current consumption without load	100 mA max
Max load current	C / P = 30 mA / channel L = 20 mA / channel
Output type*	NPN open collector (pull-up max +30V DC) push-pull / line driver HTL (AEC-7272) line driver RS-422 (AELT-5000 or equivalent)
Max output frequency	150 kHz
Counting direction	A leads B clockwise (shaft view)
Electromagnetic compatibility	according to 2014/30/EU directive
RoHS	according to 2011/65/EU directive
UL / CSA	certificate n. E212495

* for further details please see OUTPUT LEVELS under TECHNICAL BASICS section

MECHANICAL SPECIFICATIONS

Bore diameter	ø 6 / 8 mm
Enclosure rating	IP 40 (IEC 60529)
Max rotation speed	6000 rpm
Shock	50 G, 11 ms (IEC 60068-2-27)
Vibration	10 G, 10 ... 500 Hz (IEC 60068-2-6)
Moment of inertia	$2,5 \times 10^{-6} \text{ kgm}^2$ ($59 \times 10^{-6} \text{ lbft}^2$)
Starting torque (at +20°C / +68°F)	< 0,01 Nm (1,42 Ozin)
Bearing stage material	EN-AW 2011 aluminum
Shaft material	1.4305 / AISI 303 stainless steel
Housing material	PA 66 glass fiber reinforced
Bearings	2 ball bearings
Bearings life	10^9 revolutions
Operating temperature	-20° ... +85 °C (-4° ... +185°F)
Storage temperature	-25° ... +85°C (-13° ... +185°F)
Weight	100 g (3,53 oz)

CONNECTIONS

Function	Cable C / P	Cable L
+V DC	red	red
0 V	black	black
Ch. A	green	green
Ch. A-	/	brown
Ch. B	yellow	yellow
Ch. B-	/	orange
Ch. Z	blue	blue
Ch. Z-	/	white
≡	shield	shield

RESOLUTIONS

100 - 200 - 360 - 400 - 500 - **512** - 1000 - **1024** - 2000 - **2048**

please directly contact our offices for other pulses, preferred resolutions in bold