


MAIN FEATURES

Encoder series for harsh environments with high mechanical resistance requirements.
 Model 90 can be mounted by flanges or fixing clamps; model 115 has a tachometer generator REO-444 type compatible plug.

- 3 channel encoder (A / B / Z) up to 10000 ppr
- Power supply up to +28 VDC with several electronic interfaces available
- Up to 500 kHz output frequency
- Cable or connector output
- Metal cover for heavy duty applications
- Solid shaft diameter up to 11 mm
- Mounting by synchronous or REO-444 flange

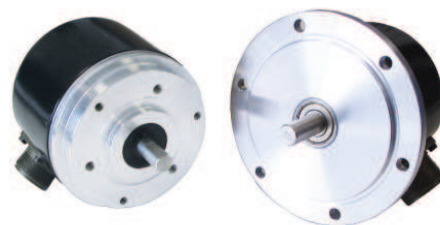


ORDERING CODE


ER	90A	500	S	5/28	N	8	X	6	P	R	.XXX
SERIES incremental encoder series EL incremental encoder series ER											
MODEL synchronous flange ø 40 mm 90A flange REO-444 115A											
RESOLUTION ppr from 1 to 10000 <i>see table for pulses availability</i>											
ZERO PULSE without zero pulse S with zero pulse Z											
POWER SUPPLY (with L electronic interface) 5 V DC 5 (with L or PC electronic interface) 8 ... 24 V DC 8/24 5 ... 28 V DC 5/28											
ELECTRONIC INTERFACE NPN N NPN open collector C push-pull P push-pull protected (AEIC-7272) PC line driver L power supply 5/28V - output RS-422 RS											
SHAFT DIAMETER (mod. 90) mm 8 (mod. 90) 9,52 (3/8") mm 9 mm 10 (mod. 115) mm 11											
ENCLOSURE RATING IP 54 X (mod. 90) IP 66 S											
MAX ROTATION SPEED (IP 66) 3000 rpm 3 (IP 54) 6000 rpm 6											
OUTPUT TYPE cable (standard length 1.5 m) P MIL connector M JIS-C-5432 connector J <i>female connector included, without female please add 162 as variant code</i>											
DIRECTION TYPE axial A radial R											
VARIANT custom version XXX											

EL - ER 90 A


fixing clamps not included

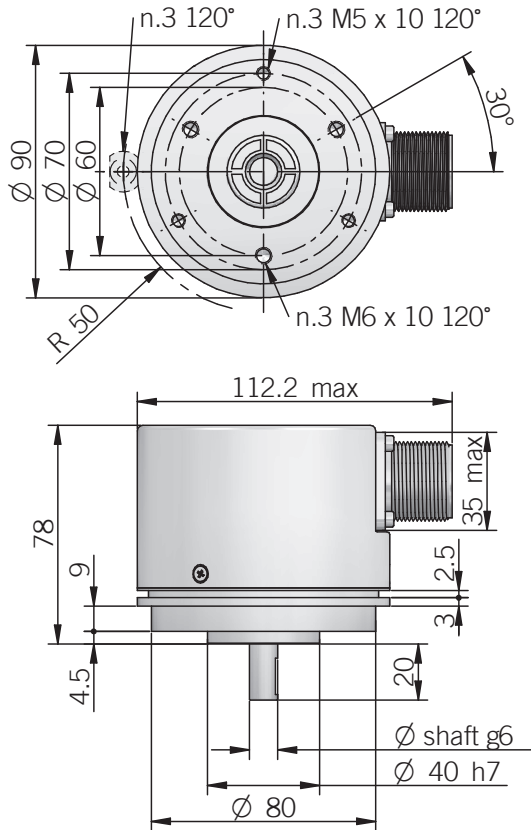


EL - ER 115 A

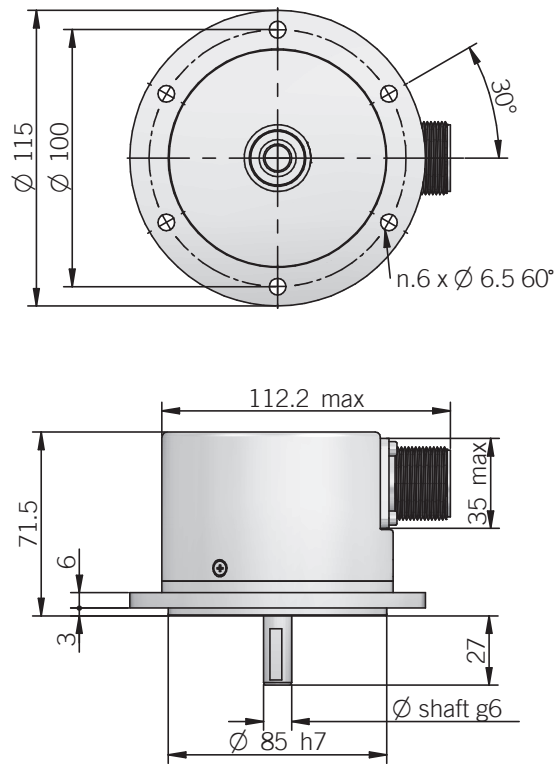

EL - ER 90 A axial output

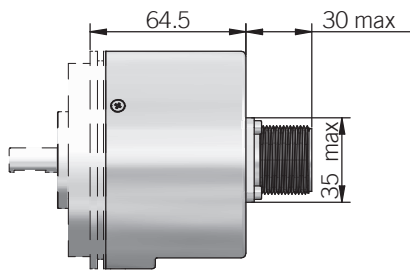


EL - ER 115 A axial output

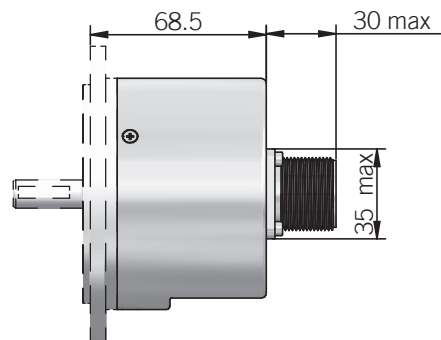

dimensions in mm

ACCESSORIES

set n.3 fixing clamps for model 90 A
P/N 94080001



ELECTRICAL SPECIFICATIONS

Resolution	from 1 to 10000 ppr
Power supply	5 = 4,5 ... 5,5 V DC 5/28 = 4,75 ... 29,4 V DC 8/24 = 7,6 ... 25,2 V DC (reverse polarity protection)
Power draw without load	800 mW
Max load current	N / C / P / PC = 50 mA / channel L / RS = 20 mA / channel
Output type*	NPN / NPN open collector / push-pull / line driver
Max output frequency	250 kHz up to 6000 ppr 500 kHz from 7200 ppr
Counting direction	A leads B clockwise (shaft view)
Electromagnetic compatibility	IEC 61000-6-2 IEC 61000-6-4

*output levels according to power supply, for further details please see under Technical basics section

EL SERIES RESOLUTIONS

1 - 2 - 4 - 5 - 10 - 15 - 16 - 20 - 25 - 30 - 32 - 40 - 50 - 60 - 70 - 80 - 90 - 160 - 180 - 350 - 450 - 660 - 700

ER SERIES RESOLUTIONS

100 - 120 - 128 - 150 - 200 - 240 - 250 - 256 - 300 - **360** - 400 - 480 - **500** - **512** - 600 - 625 - **720** - 750 - 800 - 900 - **1000** - **1024** - 1200 - 1250 - 1440 - 1500 - 1600 - 1800 - **2000** - **2048** - **2500** - 3000 - **3600** - 4000 - 4096 - **5000** - 6000 - **7200** - 8000 - 8192 - 9000 - **10000**

please directly contact our offices for other pulses, preferred resolutions in bold


MECHANICAL SPECIFICATIONS

Shaft diameter	ø 8 / 9,52 (3/8") / 10 / 11 mm
Enclosure rating	X = IP 54 (IEC 60529) S = IP 66 (IEC 60529)
Max rotation speed	X = 6000 rpm S = EL 3000 rpm / 60° C ER 3000 rpm / 70° C - 2000 rpm / 85° C
Max shaft load	200 N axial / radial
Shock	50 G, 11 ms (IEC 60068-2-27)
Vibration	10 G, 10 ... 2000 Hz (IEC 60068-2-6)
Moment of inertia	3,5 x 10 ⁻⁶ kgm ²
Starting torque (at +20°C / +68°F)	< 0,02 Nm (IP 54) < 0,06 Nm (IP 66)
Body material	EN-AW 2011 aluminum
Shaft material	1.4305 / AISI 303 stainless steel
Housing material	painted aluminum
Bearings	2 ball bearings
Bearings life	10 ⁹ revolutions
Operating temperature	-10° ... +60°C (+14° ... +140°F) EL series -25° ... +85°C (-13° ... +185°F) ER series
Storage temperature	-25° ... +70°C (-13° ... +158°F)
Weight	750 g (26,46 oz)


CONNECTIONS

Function	Cable output N / C / P / PC	Cable output Line driver	7 pin J output N / C / P / PC	7 pin J output Line Driver no Zero	7 pin M output N / C / P / PC	7 pin M output Line Driver no Zero	10 pin J output Line Driver with Zero	10 pin M output Line Driver with Zero
+V DC	red	red	6	4	F	D	4 - 5	D - E
0 V	black	black	1	6	A	F	6	F
Ch. A	green	green	3	1	C	A	1	A
Ch. A-	/	brown	/	3	/	C	7	G
Ch. B	yellow	yellow	5	2	E	B	2	B
Ch. B-	/	orange	/	5	/	E	8	H
Ch. Z	blue	blue	4	/	D	/	3	C
Ch. Z-	/	white	/	/	/	/	9	I
⏏	shield	shield	7	7	G	G	10	J


J connector (7 pin)
JIS-C-5432 Size 16
solder side view FV



M connector (7 pin)
Amphenol MS3102-E-16-S
solder side view FV



J connector (10 pin)
JIS-C-5432 Size 16
solder side view FV



M connector (10 pin)
Amphenol MS3102-E-18-1
solder side view FV

