

MAIN FEATURES


Standard ø 63 encoder series for industrial applications with high mechanical resistance requirements. These encoders are designed to support high radial and axial shaft load and they can be mounted by means of flanges or fixing clamps.

- Up to 24000 ppr with zero signal
- Several output types available
- Up to 28 V DC power supply
- Up to 300 kHz output frequency
- Cable or connector output
- Several flanges available
- Up to 6000 RPM rotation speed
- Up to IP 66 sealing




ORDERING CODE	ER	63A	M*	500	S	5/28	N	8	X	6	P	R	.XXX
SERIES incremental encoder series EL incremental encoder series ER													
MODEL synchronous flange ø 31.75 mm 63A centering square flange ø 31.75 mm 63D centering square flange ø 50 mm 63E													
METAL COVER * add for the metal cover M													
RESOLUTION ppr from 1 to 24000 see table for pulses availability													
ZERO PULSE without zero pulse S with zero pulse Z													
POWER SUPPLY (available only with L electronic output) 5 V DC 5 (available only with L or PC electronic output) 8 ... 24 V DC 8/24 5 ... 28 V DC 5/28													
ELECTRONIC INTERFACE NPN N NPN open collector C push-pull P push-pull protected (AEC-7272) PC line driver L power supply 5/28V - output RS422 RS													
SHAFT DIAMETER mm 8 9,52 (3/8") mm 9 mm 10													
ENCLOSURE RATING IP 54 X IP 66 S													
MAX ROTATION SPEED (IP 66) 3000 rpm 3 (IP 54) 6000 rpm 6													
OUTPUT TYPE cable output (standard length 1,5 m) P MIL connector output M JIS-C-5432 connector output J M12 connector output M12 M23 connector output H IP40 IEC 60130-9 connector output C <i>female connector included, without female please add 162 as variant code</i>													
DIRECTION TYPE axial A radial R													
VARIANT custom version XXX													


EL - ER 63 A

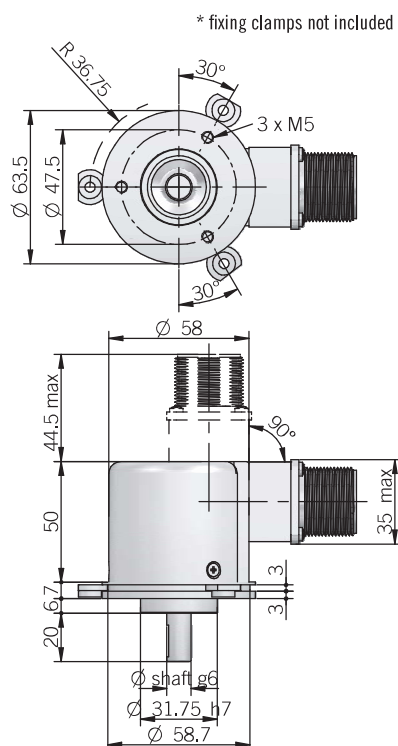


EL - ER 63 D

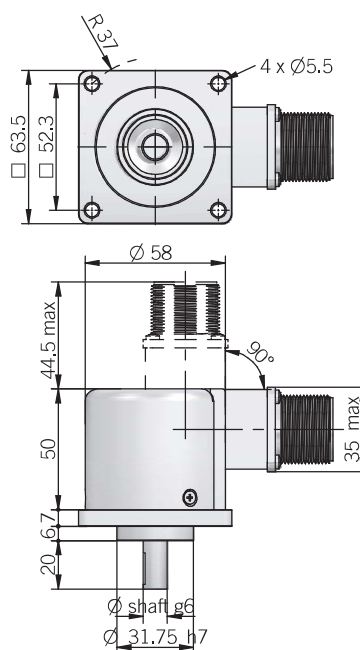


EL - ER 63 E

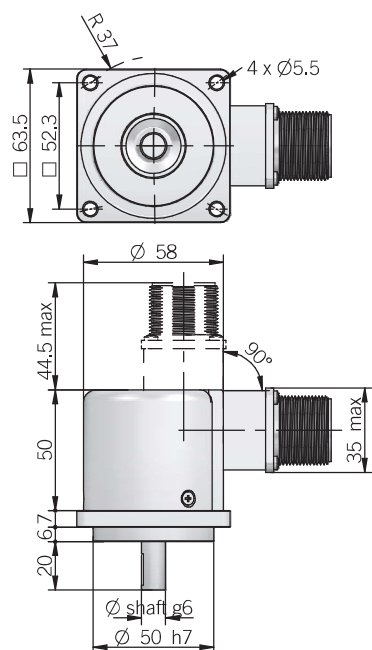

Dimension with metal cover axial output



Dimension with metal cover radial output



dimensions in mm

ELECTRICAL SPECIFICATIONS

Resolution	from 1 to 24000 ppr
Power supply	5 = 4,5 ... 5,5 V DC 5/28 = 4,75 ... 29,4 V DC 8/24 = 7,6 ... 25,2 V DC (reverse polarity protection)
Power draw without load	800 mW
Max load current	N / C / P / PC = 50 mA / channel L / RS = 20 mA / channel
Output type*	NPN / NPN open collector / push-pull / line driver
Max output frequency	300 kHz
Counting direction	A leads B clockwise (shaft view)
Electromagnetic compatibility	IEC 61000-6-2 IEC 61000-6-4

*output levels according to power supply, for further details please see under Technical basics section

EL SERIES RESOLUTIONS

1 - 2 - 4 - 5 - 10 - 15 - 16 - 20 - 25 - 30 - 32 - 40 - 50 - 60 - 70 - 80 - 90 - 160 - 180 - 350 - 450 - 660 - 700

ER SERIES RESOLUTIONS

100 - 120 - 128 - 150 - 200 - 240 - 250 - 256 - 300 - **360** - 400 - 480 - **500** - **512** - **600** - 625 - **720** - 750 - 800 - 900 - **1000** - **1024** - 1200 - 1250 - 1440 - 1500 - 1600 - 1800 - **2000** - **2048** - **2500** - 3000 - **3600** - 4000 - 4096 - **5000** - 6000 - **7200** - 8000 - 8192 - 9000 - **10000** - 10240 - 12000 - **14400** - 16000 - 16384 - 18000 - **20000** - 20480 - 24000

please directly contact our offices for other pulses, preferred resolutions in bold


MECHANICAL SPECIFICATIONS

Shaft diameter	ø 8 / 9,52 (3/8") / 10 mm
Enclosure rating	X = IP 54 (IEC 60529) S = IP 66 (IEC 60529)
Max rotation speed	X = 6000 rpm S = EL 3000 rpm / 60° C ER 3000 rpm / 70° C - 2000 rpm / 85° C
Max shaft load	200 N
Shock	50 G, 11 ms up to 2500 ppr (IEC 60068-2-27) 20 G, 11 ms from 3000 ppr (IEC 60068-2-27)
Vibration	10 G, 10 ... 2000 Hz (IEC 60068-2-6)
Moment of inertia	1,5 x 10 ⁻⁶ kgm ²
Starting torque (at +20°C / +68°F)	< 0,02 Nm (IP 54) < 0,06 Nm (IP 66)
Body material	EN-AW 2011 aluminum
Shaft material	1.4305 / AISI 303 stainless steel
Housing material	PA66 glass fiber reinforced / painted aluminum
Bearings	2 ball bearings
Bearings life	10 ⁹ revolutions
Operating temperature	-10° ... +60°C (+14° ... +140°F) EL series -25° ... +85°C (-13° ... +185°F) ER series
Storage temperature	-25° ... +70°C (-13° ... +158°F)
Weight	350 g (12,35 oz) 450 g (15,87 oz) with metal cover


CONNECTIONS

Function	Cable output N / C / P	Cable output Line driver	7 pin J output N / C / P	7 pin J output Line Driver no Zero	7 pin M output N / C / P	7 pin M output Line Driver no Zero	10 pin J output Line Driver with Zero	10 pin M output Line Driver with Zero	5 pin M12 output N / C / P	8 pin M12 output Line Driver	12 pin H output CCW	5 pin C output N / C / P	8 pin C output Line Driver
+V DC	red	red	6	4	F	D	4 - 5	D - E	2	7	12	5	7
0 V	black	black	1	6	A	F	6	F	4	1	10	1	8
Ch. A	green	green	3	1	C	A	1	A	3	6	5	2	1
Ch. A-	/	brown	/	3	/	C	7	G	/	5	6	/	2
Ch. B	yellow	yellow	5	2	E	B	2	B	1	4	8	4	3
Ch. B-	/	orange	/	5	/	E	8	H	/	3	1	/	4
Ch. Z	blue	blue	4	/	D	/	3	C	5	2	3	3	5
Ch. Z-	/	white	/	/	/	/	9	I	/	8	4	/	6
⏏	shield	shield	7	7	G	G	10	J	housing	housing	9	/	/


J connector (7 pin)
JIS-C-5432 Size 16
solder side view FV




M connector (7 pin)
Amphenol MS3102-E-16-S
solder side view FV




M12 connector (5 pin)
M12 A coded
solder side view FV




C connector (5 pin)
IEC 60130-9
solder side view FV




H connector (12 pin) - M23 CCW
Hummel 7.410.000000 -
7.002.912.603
solder side view FV




J connector (10 pin)
JIS-C-5432 Size 16
solder side view FV



M connector (10 pin)
Amphenol MS3102-E-18-1
solder side view FV



M12 connector (8 pin)
M12 A coded
solder side view FV



C connector (8 pin)
IEC 60130-9
solder side view FV

