



The KE Performance Level 'c' series of GEFRA are pressure transmitters for using in high temperature environment.

The main characteristic of this series is the capability to read temperature of the media up to 538°C (1000°F).

The constructive principle is based on the hydraulic transmission of the pressure.

The fluid-filled system assures the temperature stability NaK (Potassium/Sodium).

The physical measure is transformed in a electrical measure by means of the strain-gauge technology.

MAIN FEATURES

- Pressure ranges from:
0-17 to 0-1000 bar / 0-250 to 0-15000 psi
- Accuracy: $< \pm 0.25\%$ FSO (H); $< \pm 0.5\%$ FSO (M)
- Hydraulic transmission system for pressure signal guarantees stability at working temperature (NaK). Liquid conforming to RoHS Directive. NaK is defined as a safe substance (GRAS)
- Quantity of NaK contained per model: KE0 series (30mm³) [0.00183 in³], KE1, KE2, KE3 (40mm³) [0.00244 in³]
- 1/2-20UNF, M18x1.5 standard threads; other types available on request
- Autozero function on board / external option
- Inconel 718 diaphragm with GTP+ coating for temperatures up to 538°C (1000°F)
- 15-5 PH diaphragm with GTP+ coating for temperatures up to 400°C (750°F)
- Hastelloy C276 diaphragm for temperatures up to 300°C (570°F)
- 17-7 PH corrugated diaphragm with GTP+ coating for ranges below 100bar-1500psi up to 400°C (750°F)
- Stem material: 17-4 PH

GTP+ (advanced protection)

Coating with high resistance against corrosion, abrasion and high temperature

AUTOZERO FUNCTION

All signal variations in the absence of pressure can be eliminated by using the Autozero function.

This function is activated by closing a magnetic contact located on the transmitter housing.

The procedure is permitted only with pressure at zero.


TECHNICAL SPECIFICATIONS

Accuracy (1)	H $\leq \pm 0.25\%$ FSO (100...1000 bar) M $\leq \pm 0.5\%$ FSO (35...1000 bar)
Resolution	16 bit
Measurement range	0..17 to 0..1000bar 0..250 to 0..15000psi
Maximum overpressure (without degrading performances)	2 x FS 1.5 x FS above 700bar/10000psi
Measurement principle	Extensimetric
Power supply	13...30Vdc
Maximum current absorption	23mA (40mA with relay optional)
Output signal Full Scale (FSO)	20mA
Zero balance (tolerance $\pm 0.25\%$ FSO)	4mA
Response time (10...90% FSO)	8ms
Output noise (RMS 10-400Hz)	$< 0.025\%$ FSO
Calibration signal	80% FSO
Power supply polarity reverse protection	YES
Compensated temperature range housing	0...+85°C
Operating temperature range housing	-30...+85°C
Storage temperature range housing	-40...+125°C
Thermal drift in compensated range: Zero / Calibration / Sensibility	$< 0.02\%$ FSO/°C
Diaphragm maximum temperature	538°C / 1000°F
Zero drift due to change in process temperature (zero)	< 3.5 bar/100°C / < 28 psi/100°F
Thermocouple (model KE2)	STD : type "J" (isolated junction)
Protection degree (6-pole female connect)	IP65

FSO = Full scale output: (1) BFSL method (Best Fit Straight Line): includes combined effects of Non-Linearity, Hysteresis and Repeatability.

MECHANICAL DIMENSIONS


KE0

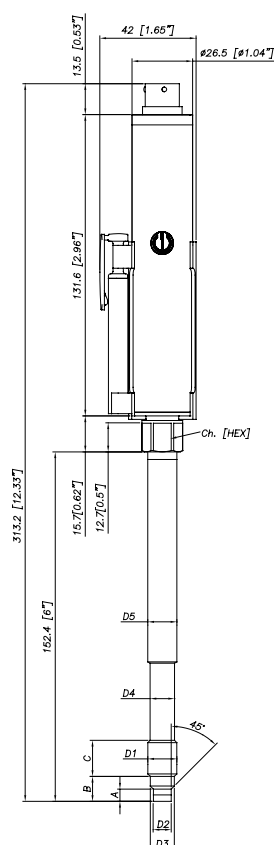


D1	1/2 - 20UNF
D2	$\phi 7.8 \text{ } ^{-0.05}$ [$\phi 0.31'' \text{ } ^{-0.002}$]
D3	$\phi 10.5 \text{ } ^{-0.025}$ [$\phi 0.41'' \text{ } ^{-0.001}$]
D4	$\phi 10.67$ [$\phi 0.42''$]
D5	$\phi 12.7$ [$\phi 0.5''$]
A	$5.56 \text{ } ^{-0.26}$ [$0.22'' \text{ } ^{-0.01}$]
B	11.2 [$0.44''$]
C	15.74 [$0.62''$]
Ch [Hex]	16 [$5/8''$]

D1	M18x1.5
D2	$\varnothing 10$ -0.05 [$\varnothing 0.394''$ -0.002]
D3	$\varnothing 16$ -0.08 [$\varnothing 0.63''$ -0.003]
D4	$\varnothing 16$ -0.4 [$\varnothing 0.63''$ -0.016]
D5	$\varnothing 18$ [$\varnothing 0.71''$]
A	6 -0.26 [$0.24''$ -0.01]
B	14.8 -0.4 [$0.58''$ -0.016]
C	19 [$0.75''$]
Ch [Hex]	19 [$3/4''$]


KE1

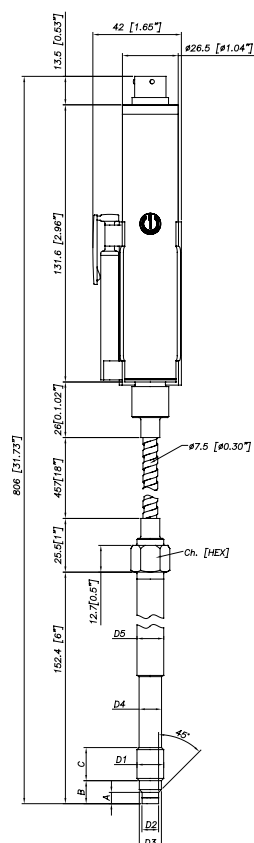

KE2

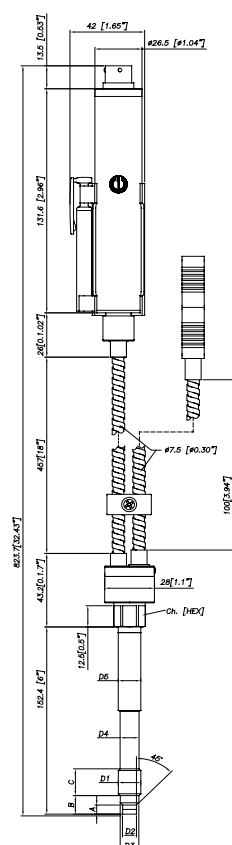

KE3

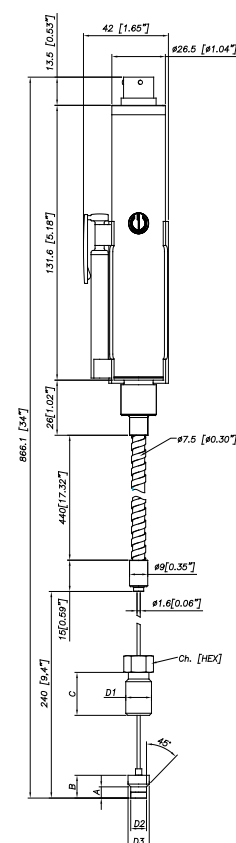

NOTE : dimensions refer to rigid stem length option “4” (153 mm – 6”)

WARNING : For installation use a maximum tightening torque of 56 Nm (500 in-lb)

SELF DIAGNOSTICS

Below the conditions detected by the sensor self-diagnostics:

- Cut cable / device non connected / broken power supply, output <3.6mA
- Pin detachment, output >21mA
- Pressure above 200% of the span, output >21mA
- Voltage monitor in case of overvoltage/undervoltage/voltage variation in the electronics, output <3.6mA
- Program sequence error, output <3.6mA
- Overtemperature on the electronics, output <3.6mA
- Error on the primary element output or on the first amplification stage, output <3.6mA

OPTIONAL RELAY OUTPUT FOR EXCESS PRESSURE PROTECTION

Safety relay characteristics:

- Activation threshold to be defined in the order code
- Rated carry current: 1A
- Rated voltage: 24Vdc \pm 20%
- Switch accuracy: 2 x sensor accuracy
- Hysteresis: 2% FSO

SUPPLY	OUTPUT	RELAY STATUS
OFF	-	OPEN
ON	< X%fs	CLOSED
ON	> X%fs	OPEN
ON	output < 3,6mA	OPEN
ON	output > 21mA	OPEN

NAMUR COMPLIANCE

The sensors are tested according to Namur NE21 recommendations. The same compatibility is valid for the NE43 Namur recommendation with the following sensor behaviour in case of breakdown:

- Cut cable: breakdown information as the signal is <3,6mA
- Device not connected: breakdown information as the signal is <3,6mA
- Broken power-supply: breakdown information as the signal is <3,6mA

or in case of performance problems:


- most common failures on primary sensors: the signal goes to >21mA

Note: in all the remaining situations, the output signal is always included between 3,6 and 21mA.




Recommendation: the error level set by the customer (e.g. maximum pressure value) has to be inside the nominal range

LOAD DIAGRAM

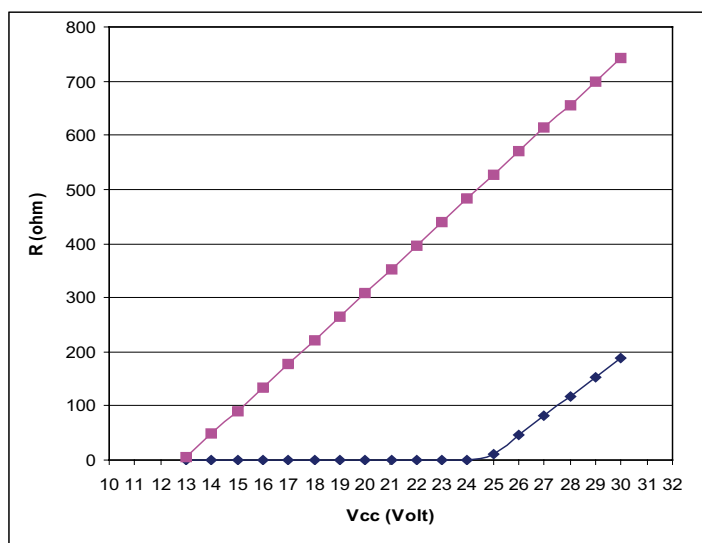

The diagram shows the optimum ratio between load and power supply for transmitters with 4...20mA output. For correct function, use a combination of load resistance and voltage that falls within the two lines in the graph above.


AUTOZERO FUNCTION

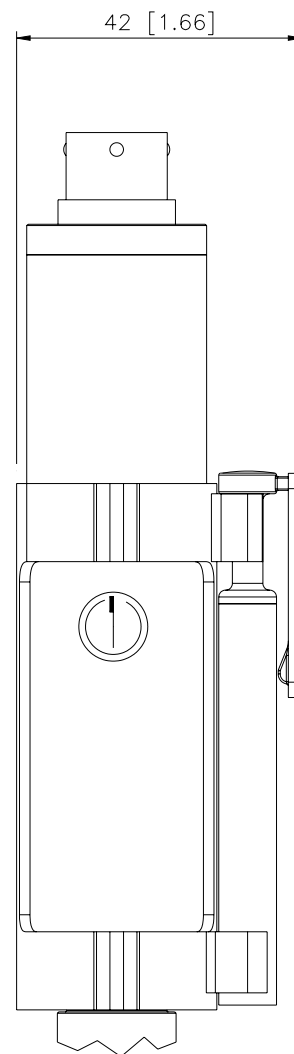


The Autozero function is activated through a magnetic contact (external magnet supplied with the sensor). See the manual for a complete Autozero function explanation.

ELECTRICAL CONNECTIONS


CURRENT OUTPUT

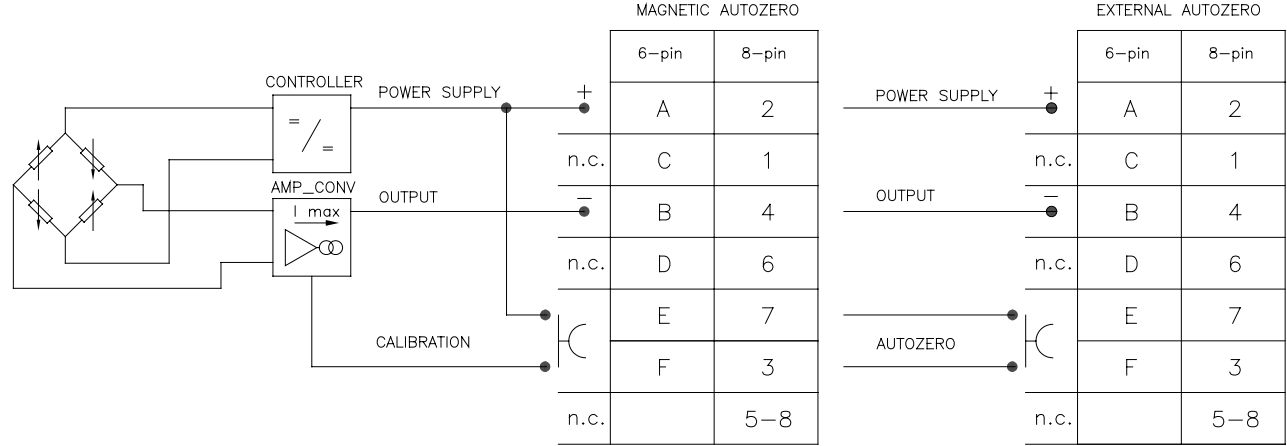


The cable shield is tied to connector via cable clamp

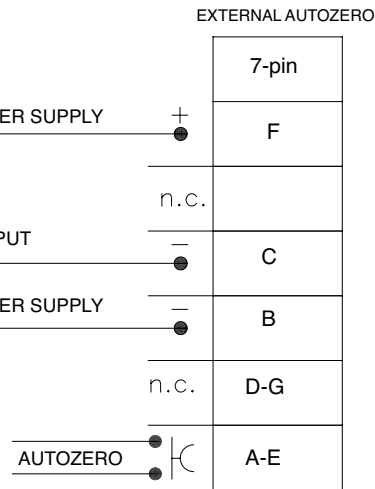

RELAY OUTPUT

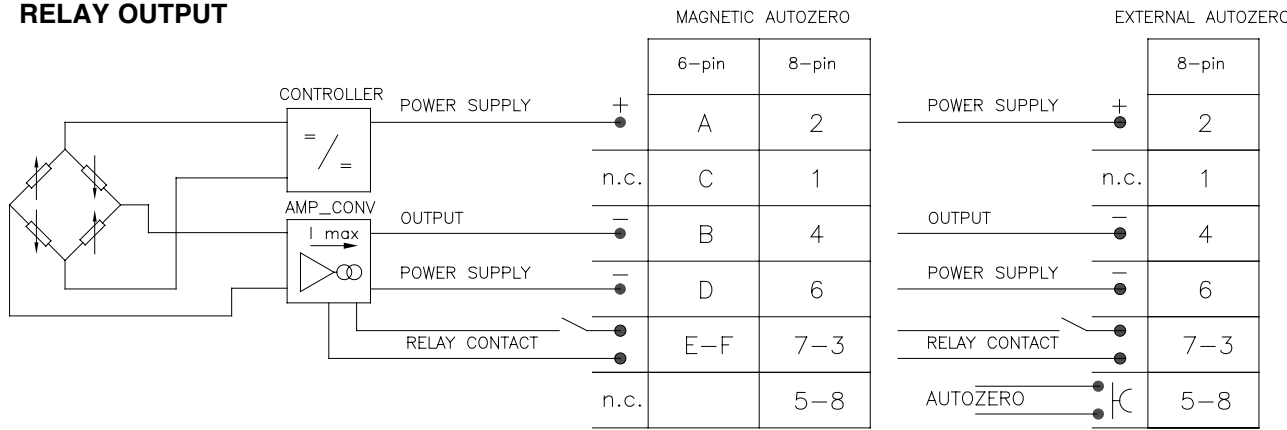


The cable shield is tied to connector via cable clamp

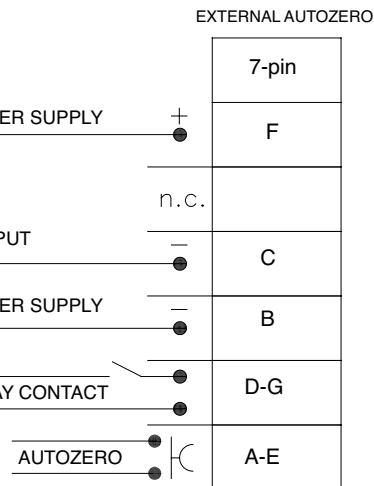


ELECTRICAL CONNECTIONS


6 pin connector VPT07RA10-6PT2 (PT02A-10-6P)



8 pin connector (Binder) M16 DIN/EN45326 (09-0173-00-08)



7 pin connector (AMPHENOL) 62IN-5016-10-7P-4-M



ACCESSORIES

Connectors

6-pin female connector (IP65 protection degree)
7-pin female connector (IP65 protection degree)
8-pin female connector (IP65 protection degree)

Extension cables

6-pin connector with 8m (25ft) cable
6-pin connector with 15m (50ft) cable
6-pin connector with 25m (75ft) cable
6-pin connector with 30m (100ft) cable

8-pin connector with 8m (25ft) cable
8-pin connector with 15m (50ft) cable
8-pin connector with 25m (75ft) cable
8-pin connector with 30m (100ft) cable

Accessories

Mounting bracket
Dummy plug for 1/2-20UNF
Dummy plug for M18x1.5
Drill kit for 1/2-20UNF
Drill kit for M18x1.5
Cleaning kit for 1/2-20UNF
Cleaning kit for M18x1.5
Fixing pen clip
Autozero pen

Thermocouple for KE2 model

Type "J" (153mm - 6" rigid rod)

CON300
CON345
CON027

C08WLS
C15WLS
C25WLS
C30WLS

C08WLS8
C15WLS8
C25WLS8
C30WLS8

SF18
SC12
SC18
KF12
KF18
CT12
CT18
PKIT 379
PKIT 378

TTER 601

Cable color code	
Conn.	Wire
A-2	Red
B-4	Black
C-1	White
D-6	Green
E-7	Blue
F-3	Orange
5	Grey
8	Pink

ORDER CODE

K		0000		X	000		X	00	
Output Relay Version (activation threshold): X = no relay B = 80% fs A = 70% fs C = 90% fs									
000= Special executions									
OUTPUT SIGNAL		E Autozero esterno (*) - Autozero magnetico (*) as an alternative to the CAL function							
4...20mA		E							
VERSION		P Performance Level='c' CONTACT DIAPHRAGM I INCONEL 718 (538°C*) S 15-5 PH (400°C*) H HASTELLOY C276 (300°C*) (*) max temperature							
Rigid rod		0							
Rigid + flexible rod		1							
With thermocouple		2							
Exposed capillary		3							
CONNECTOR		FLEXIBLE ROD LENGTH (*) (mm/inches) Standard (KE0) 0 none Standard (KE1,KE2) D 457mm 18" E 610mm 24" F 760mm 30" Standard (KE3) L 711mm 28" Available on request A 76mm 3" B 152mm 6" C 300mm 12"							
6 pin		6							
7 pin		7							
8 pin		8							
ACCURACY CLASS		RIGID ROD LENGTH (*) (mm/inches) Standard (KE0, KE1, KE2) 4 153mm 6" 5 318mm 12.5" Standard (KE3) 0 none Available on request 1 38mm 1.5" 2 50mm 2" 3 76mm 3" 6 350mm 14" 7 400mm 16" 8 456mm 18" (*) max. combined rigid / flexible stem length is 1000mm - 39"							
0.25% FSO (ranges ≥ 100 bar/1500 psi)		H							
0.5% FSO		M							
MEASUREMENT RANGE		THREADING Standard 1/2 - 20 UNF 1 M18 x 1.5 4							
bar		psi							
17	B17U	250	P25D						
35	B35U	500	P05C						
50	B05D	750	P75D						
70	B07D	1000	P01M						
100	B01C	1500	P15C						
200	B02C	3000	P03M						
350	B35D	5000	P05M						
500	B05C	7500	P75C						
700	B07C	10000	P10M						
1000	B01M	15000	P15M						
(*) Hastelloy diaphragm not available for pressure range ≤ 70 bar (1000 psi)									

Example

KE1-6-M-B07C-1-4-D-I-P

Melt pressure transducer, 4...20mA output, 6-pin connector, 1/2-20 UNF threading, 700 bar pressure range, 0.5% accuracy, 153 mm (6") rigid rod, 457 mm (18") flexible rod; membrane Inconel 718; Performance Level='c'

Sensors are manufactured in compliance with:

- EMC directive
- RoHS directive
- machinery directive

Electrical installation requirements and Conformity certificate are available on our web site: www.gefran.com

GEFRAN reserves the right to make any kind of design or functional modification at any moment without prior notice

GEFRAN spa
 via Sebina, 74
 25050 PROVAGLIO D'ISEO (BS) - ITALIA
 tel. 0309888.1 - fax. 0309839063
 Internet: <http://www.gefran.com>

GEFRAN

DTS_KE-PLc_11-2016_ENG