


MT4B / 5B / 8B Series ø45mm, ø56mm, ø85mm Steady function Tower Light

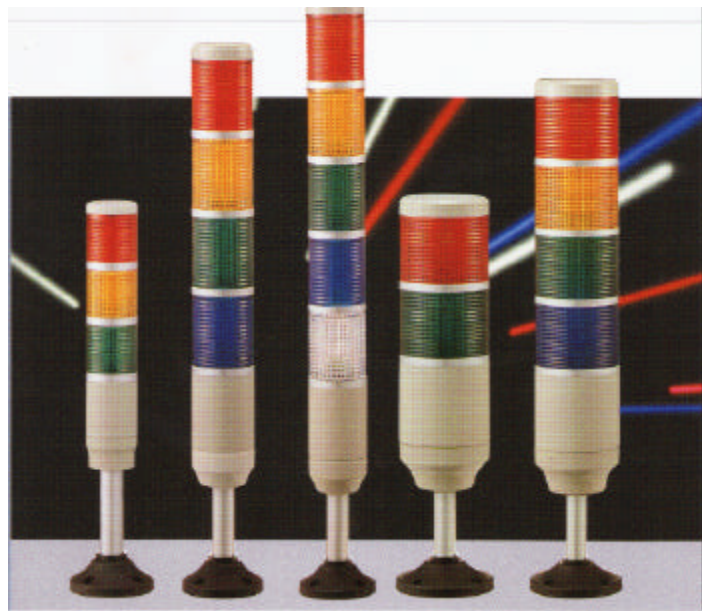


Features

- Prism-cut lenses for superior light distribution
- 4 mounting styles available
- One to five light models
- 4 operating voltage available
- 5 lens colors available
- Inexpensive price

Specifications

Series	MT 4B	MT 5B	MT 8B
Power supply	12VDC, 24VDC, 120VAC, 240VAC		
IP level	IP 56 / UL NEMA 12, 3R		
Lens color	Red, Green, Yellow, Blue, Clear		
Current consumption	1 Stack 12V:0.4A/24V:0.2A/120V:0.04A/240V:0.02A	12V:0.8A/24V:0.4A/120V:0.08A/240V:0.04A	
	2 Stack 12V:0.8A/24V:0.4A/120V:0.08A/240V:0.04A	12V:1.7A/24V:0.8A/120V:0.17A/240V:0.08A	
	3 Stack 12V:1.2A/24V:0.6A/120V:0.12A/240V:0.06A	12V:2.5A/24V:1.2A/120V:0.25A/240V:0.12A	
	4 Stack 12V:1.6A/24V:0.8A/120V:0.16A/240V:0.08A	12V:3.3A/24V:1.7A/120V:0.33A/240V:0.17A	
	5 Stack 12V:2.0A/24V:1.0A/120V:0.2A/240V:0.1 A	12V:4.2A/24V:2.1 A/120V:0.4A/240V:0.2A	
Bulb type	MAB-T09-S-volt/5W		MAB-T15-D-volt/10W
Bulb voltage and wattage	12V : 12V5W, 24V : 24V5W, 120V : 120V5W, 240V : 240V5W		12V : 12V10W, 24V : 24V10W, 120V : 120V10W, 240V : 240V10W
Approvals	c UL us / CE (Only 24VAC/DC, 120VAC, 240VAC)		

Dimensions

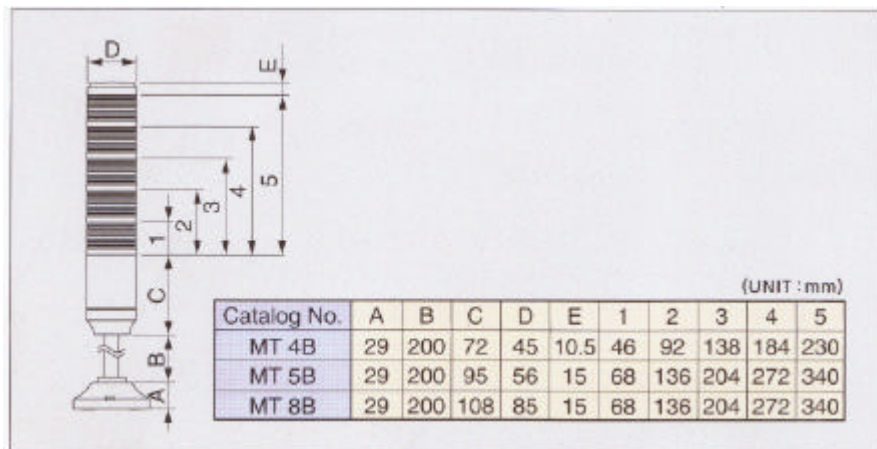

• Ordering information

		MT	5B	3	A	L	RYG
		1	2	3	4	5	6
1	MT	Series					
2	48	45mm diameter only Steady function					
	5B	56mm diameter only Steady function					
	8B	85mm diameter only Steady function					
3	1	1 Stack (Red)					
	2	2 Stack (Red+Green)					
	3	3 Stack (R+Yellow+G)					
	4	4 Stack (R+Y+G+Blue)					
	5	5 Stack (R+Y+G+B+Clear)					
4	D	12VAC / DC					
	A	24VAC / DC					
	B	120VAC					
	C	240VAC					
	L	Leads out					
6	R	Red lens					
	G	Green lens					
	Y	Yellow lens					
	B	Blue lens					
	C	Clear lens					

• Connections

