
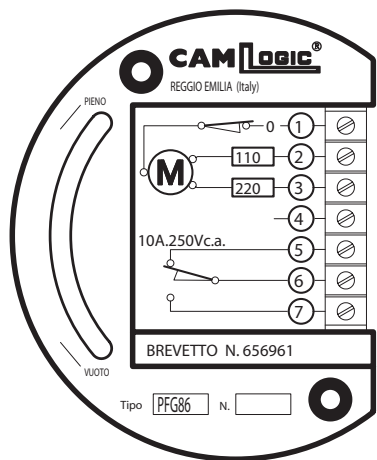


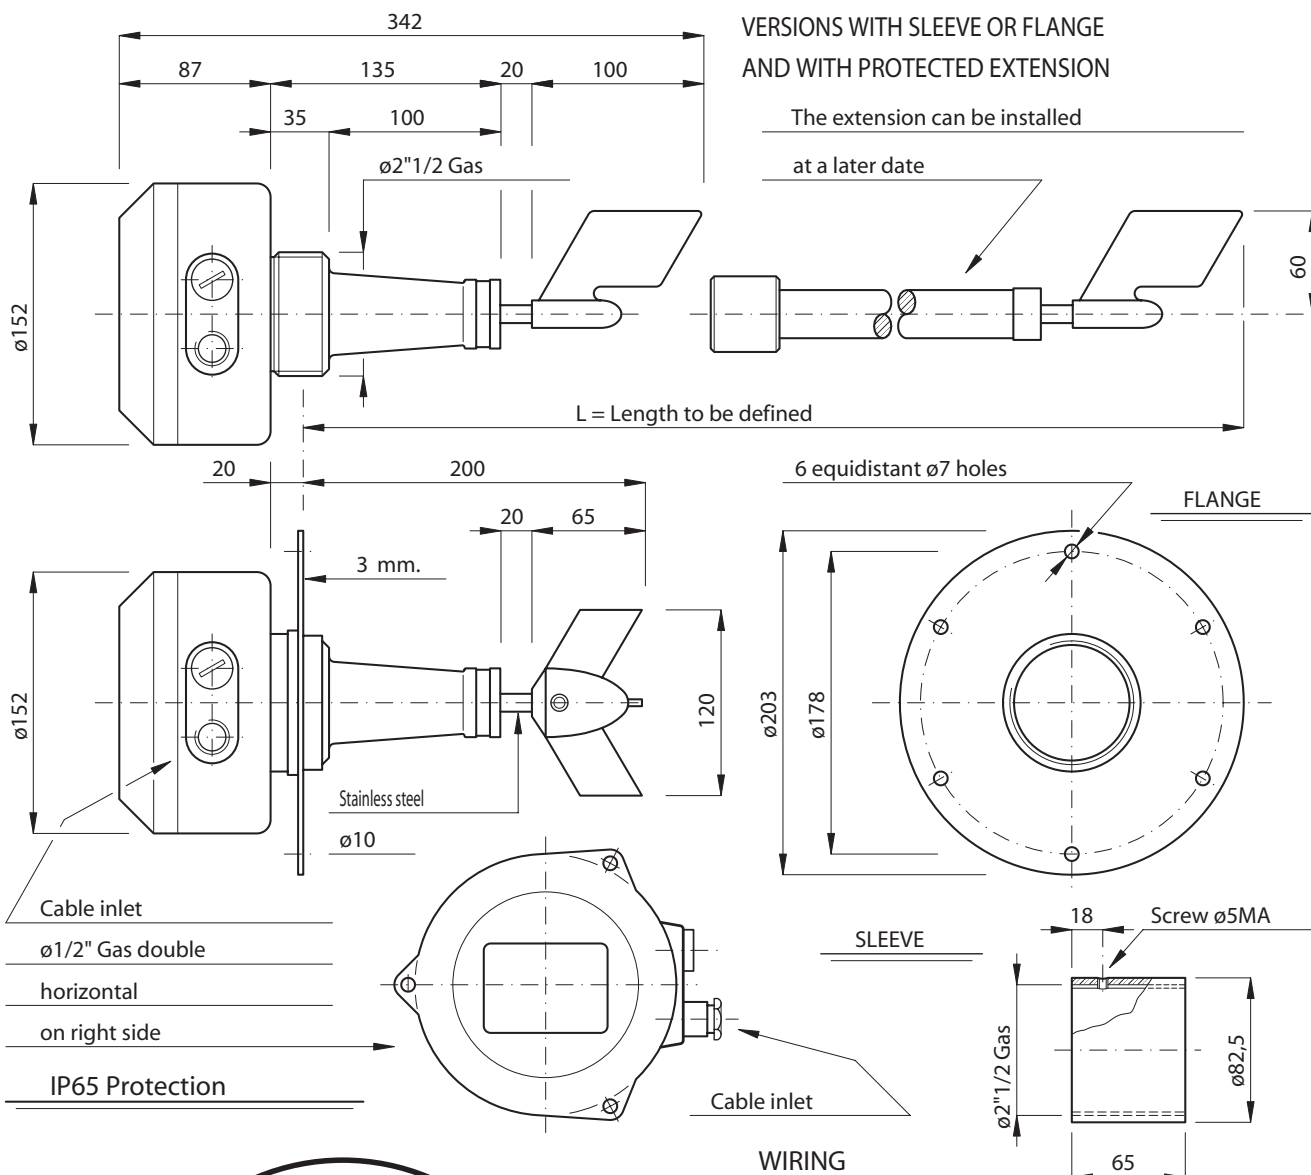

Certificate number TÜV 03 ATEX 2374 X

Electric motor draw 4 W

- 1 - Common power supply
- 2 - Power supply 110 Va.c. 50/60 Hz
- 3 - Power supply 220 Va.c. 50/60 Hz
- 4 - Not used
- 5 - NC contact 10A/250 Va.c.
- 6 - Common contacts
- 7 - NO contact 10A/250 Va.c.

Ambient temperature range -20 to +70 °C

Weight : PFG-86 2,400 Kg - PFG-86/F 2,700 Kg

On request power supply at 24/48 Va.c. 50/60 Hz

On request power supply at 24 Vd.c.

Maximum operational pressure 3 bar

PFG-86 = with 2"1/2 Gas thread - PFG-86/F = with flange

