



PME Series

Ø45mm LED Steady & Flashing



- Long life and reliability
- Prism-cut lenses for even light distribution
- Surface, Pole or Wall Mounted (Order poles & bases separately)
- Wire leads

Specifications

Power Supply		12V AC/DC	24V AC/DC	90-240VAC
Current Draw	R	55 mA	30 mA	22 mA
	Y	70 mA	45 mA	25 mA
	G	40 mA	35 mA	25 mA
	B	36 mA	35 mA	25 mA
	C	40 mA	35 mA	25 mA
Flashing rate		Approx. 80 ± 5 flashes/min.		
Rating		IP 52		
Vibration		3mm at 10~55Hz		
Ambient Temp.		-15°C~40°C		
Ambient Humidity		45~85% RH		
Recommended Wire Size		1007 UL / 22 AWG		

Ordering Information

PME	F	5	01	RYGBC
①	②	③	④	
① Light Style	F			Steady Steady & Flashing
② Number of Stacks	1			1 Light
	2			2 Lights
	3			3 Lights
	4			4 Lights
	5			5 Lights
③ Power Supply	01			12V AC/DC
	02			24V AC/DC
	FF			90~240V AC
④ Lens Colors (top to bottom)	R			Red
	Y			Yellow
	G			Green
	B			Blue
	C			Clear

Replacement parts

LED	PMELED-4(□)	24V, 90~240V AC/DC
	PMELED-4(□)-12	12V AC/DC
Lens	PML-4(□)	—


(□): indicates color of LED or Lens; R, Y, G, B or C

Wiring Diagram

12V & 24V AC/DC

Steady Lights


PME-001-00000 PME-002-00000

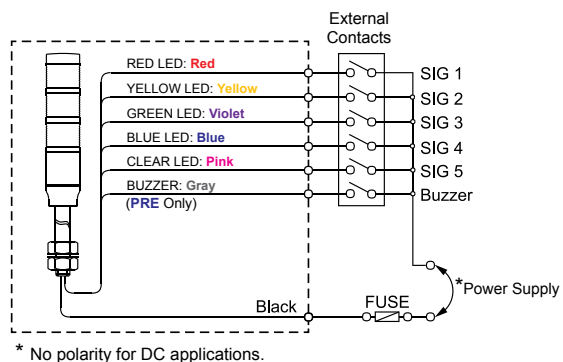

90-240V AC


Steady Lights

PME-0FF-00000

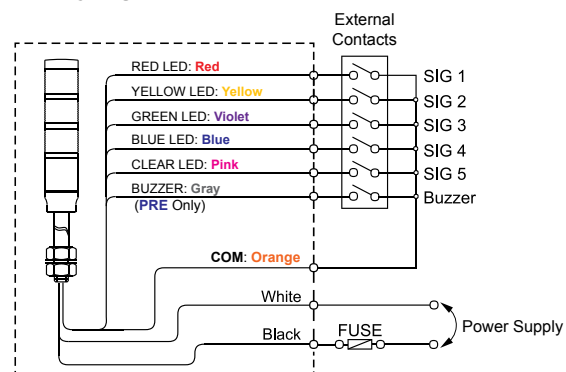

Dimensions

unit: mm

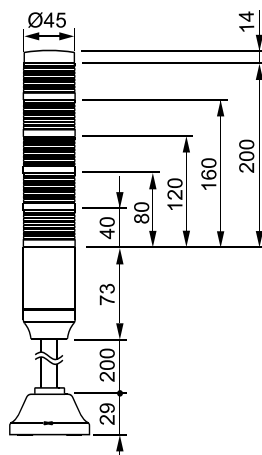


See page B1 - B2
for mounting options
and accessories

12V & 24V AC/DC, 90-240V AC

Steady & Flashing Lights

PMEF-001-00000 PMEF-002-00000

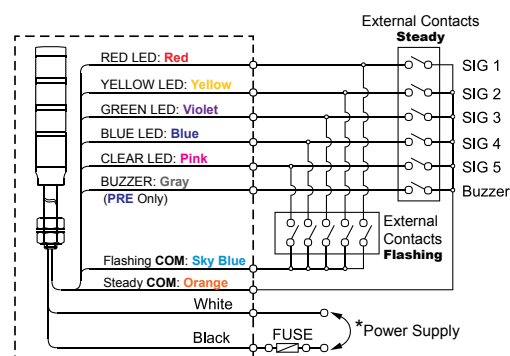

* No polarity for DC applications.