




Main features


- Temperature limits: - 40 ... + 600° C
- Tolerance: UNI 7937, IEC 751 standards:
 $\pm 0.15^{\circ}\text{C}$ at 0°C for class A (1/2 DIN)
 $\pm 0.30^{\circ}\text{C}$ at 0°C for class B (1 DIN)
 $\pm 0.10^{\circ}\text{C}$ at 0°C for 1/3 DIN class
- Ceramic insulation of sensor, PT100 at 0°C
- Application versatility

MODELS


TR6 A
without fitting

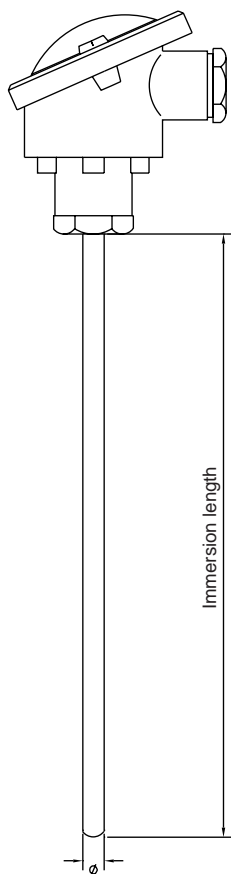


TR6 B
with adjustable
compression fitting

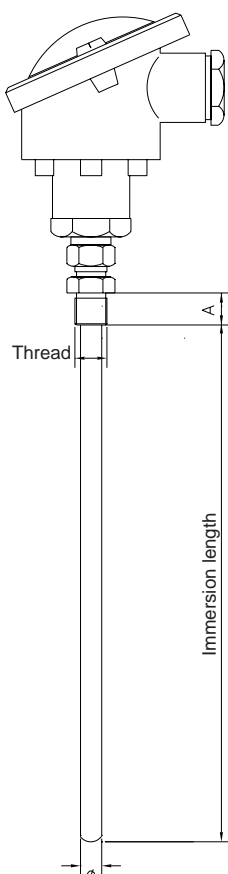


TR6 C
with welded fitting

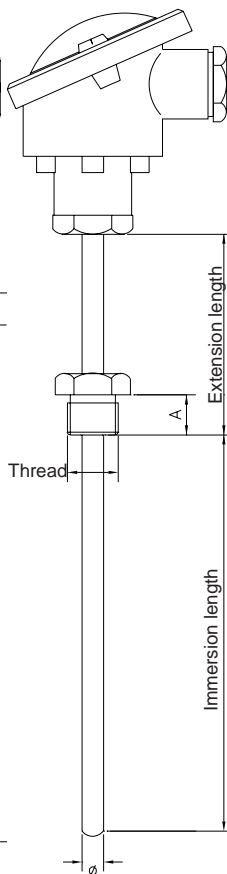

TR6 D
with welded fitting
under the head

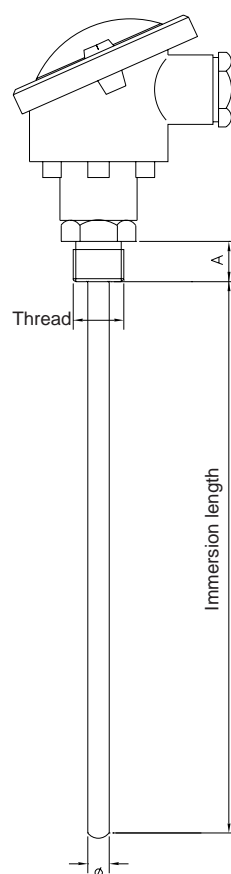

TR6 E
with female fitting and
welded ring

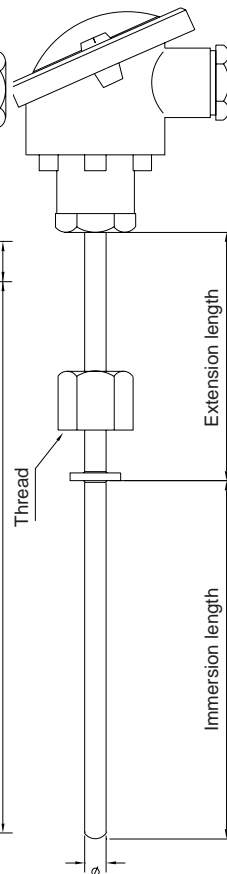

ORDER CODE

[illegible]

GEFRAN spa reserves the right to make any kind of design or functional modification at any moment without prior notice



GEFRAN spa
via Sebina, 74
25050 PROVAGLIO D'ISEO (BS) - ITALIA
ph. 0309888.1 - fax. 0309839063
Internet: <http://www.gefran.com>
www.gefranonline.com



cod. 80757 - 11/00