

Alphanumeric OIT

MicroOIT
Series

OIT4160



**CLASS I
DIVISION 2**
Rated

Text Displays with Customizable Keys



- 2 line by 20 character VFD display
- Membrane-style keypad
- 6 User-definable function keys
- Serial RS232/RS485 ports
- Multiple PLC registers per screen
- Chain screens together
- Floating point
- Linear Scaling
- 500 configurable screens
- Recipes & Menus
- NEMA 4, CE, UL certified
- Class I Division 2 rating
- Extended operating temperature (-10 to +65°C)
- Programmed with OITware-200 software

The OIT4160 has an alphanumeric display and a membrane-style keypad. Each of the six function keys are programmable.

A wide range of communications drivers are available: from Allen-Bradley, Modicon, and GE Fanuc, to Keyence, Control Microsystems, and Bristol Babcock. Over 75 families of PLCs and motion controllers are supported.

The configuration software includes recipes, menus, alarms, and the ability to create over 500 screens. Designed for



harsh industrial environments, this OIT carries a Class I Division 2 rating and operate under a wide temperature range.

The OIT4160 is a powerful and durable operator interface.

**Every Machine
Needs the
Human Touch**



www.maplesystems.com

OIT4160 Specifications

Hardware

Display	2 line by 20 character backlit VFD display Viewing Angle – approximately 90 degree
Key Type	Tactile key feedback
Function Key	6 user-definable screen-dependent function keys

Mechanical

Enclosure	Aluminum
Dimensions (WxHxD)	6 x 4 x 1.77 inches [152.4 x 101.2 x 45 mm]
Weight	0.99 lbs [0.45 kg]
Mounting	Panel
Power Requirements	12 to 30 VDC, 170 mA maximum
Warranty	2 years

Environmental

Operating Temperature	14 ~ 149°F (-10 ~ 65°C)
Storage Temperature	-22 ~ 176°F (-30 ~ 80°C)
Relative Humidity	5% ~ 95% (non-condensing)
Ratings	NEMA4, 4X indoor, 12
Certifications	CE, UL, cULus, Class I Div 2 rated

Enhanced Features

Recipe Screens	Allow the operator to download or upload preset values into PLC registers.
Memory Storage for Motion Controllers	Stores data internally using the recipe screen feature. Data can be uploaded from the controller and stored in the OIT's non-volatile flash memory.
Multiple Language Support	Allows you to "split" the 500 screens into 2, 5 or 10 separate groups or languages.

Specifications subject to change without notice.

Screens


Total #	500 screens
Message Screens	<ul style="list-style-type: none"> • Beep on display • One line of 128 characters of scrolling text • Display for a preset length of time from 1 to 255 sec. • Chain to other message screens • Up to 25 register monitors
Recipe Screens	<ul style="list-style-type: none"> • Beep on display • One step download/upload with a function key • Up to 20 preset values (operator adjustable) • Display for a preset length of time from 1 to 255 sec. • One line of 128 characters of scrolling text • Up to 25 register monitors
Alarm Screens	<ul style="list-style-type: none"> • 4 priority levels • 9 audible alert types • One line of 128 characters of scrolling text • Up to 25 register monitors
Menu Screens	<ul style="list-style-type: none"> • Branch off to 9 message, recipe or menu screens • Chain to other menu screens • Display for a preset length of time from 1 to 255 sec. • One line of 128 characters of scrolling text • Up to 25 register monitors
Help Screens	• Display from any message, recipe or menu screens

Mechanical

Features	<ul style="list-style-type: none"> • Adjustable decimal location and field width • Fully programmable linear scaling on decimal, signed and long formats • Hi/low limits • Increment/decrement value • Left/right justification • Optional comma insertion, hide data & leading zero • Read only or read/write
Formats	<ul style="list-style-type: none"> • Decimal • Signed • Long • 4-digit or 8-digit BCD • Binary --- 1/0 coil, on/off coil, bank 8 or bank 16 • ASCII string (allows display of ON/OFF or other text strings in place of 1/0 values)

Order Number

OIT4160-B00	2 line by 20 character VFD alphanumeric OIT
-------------	---

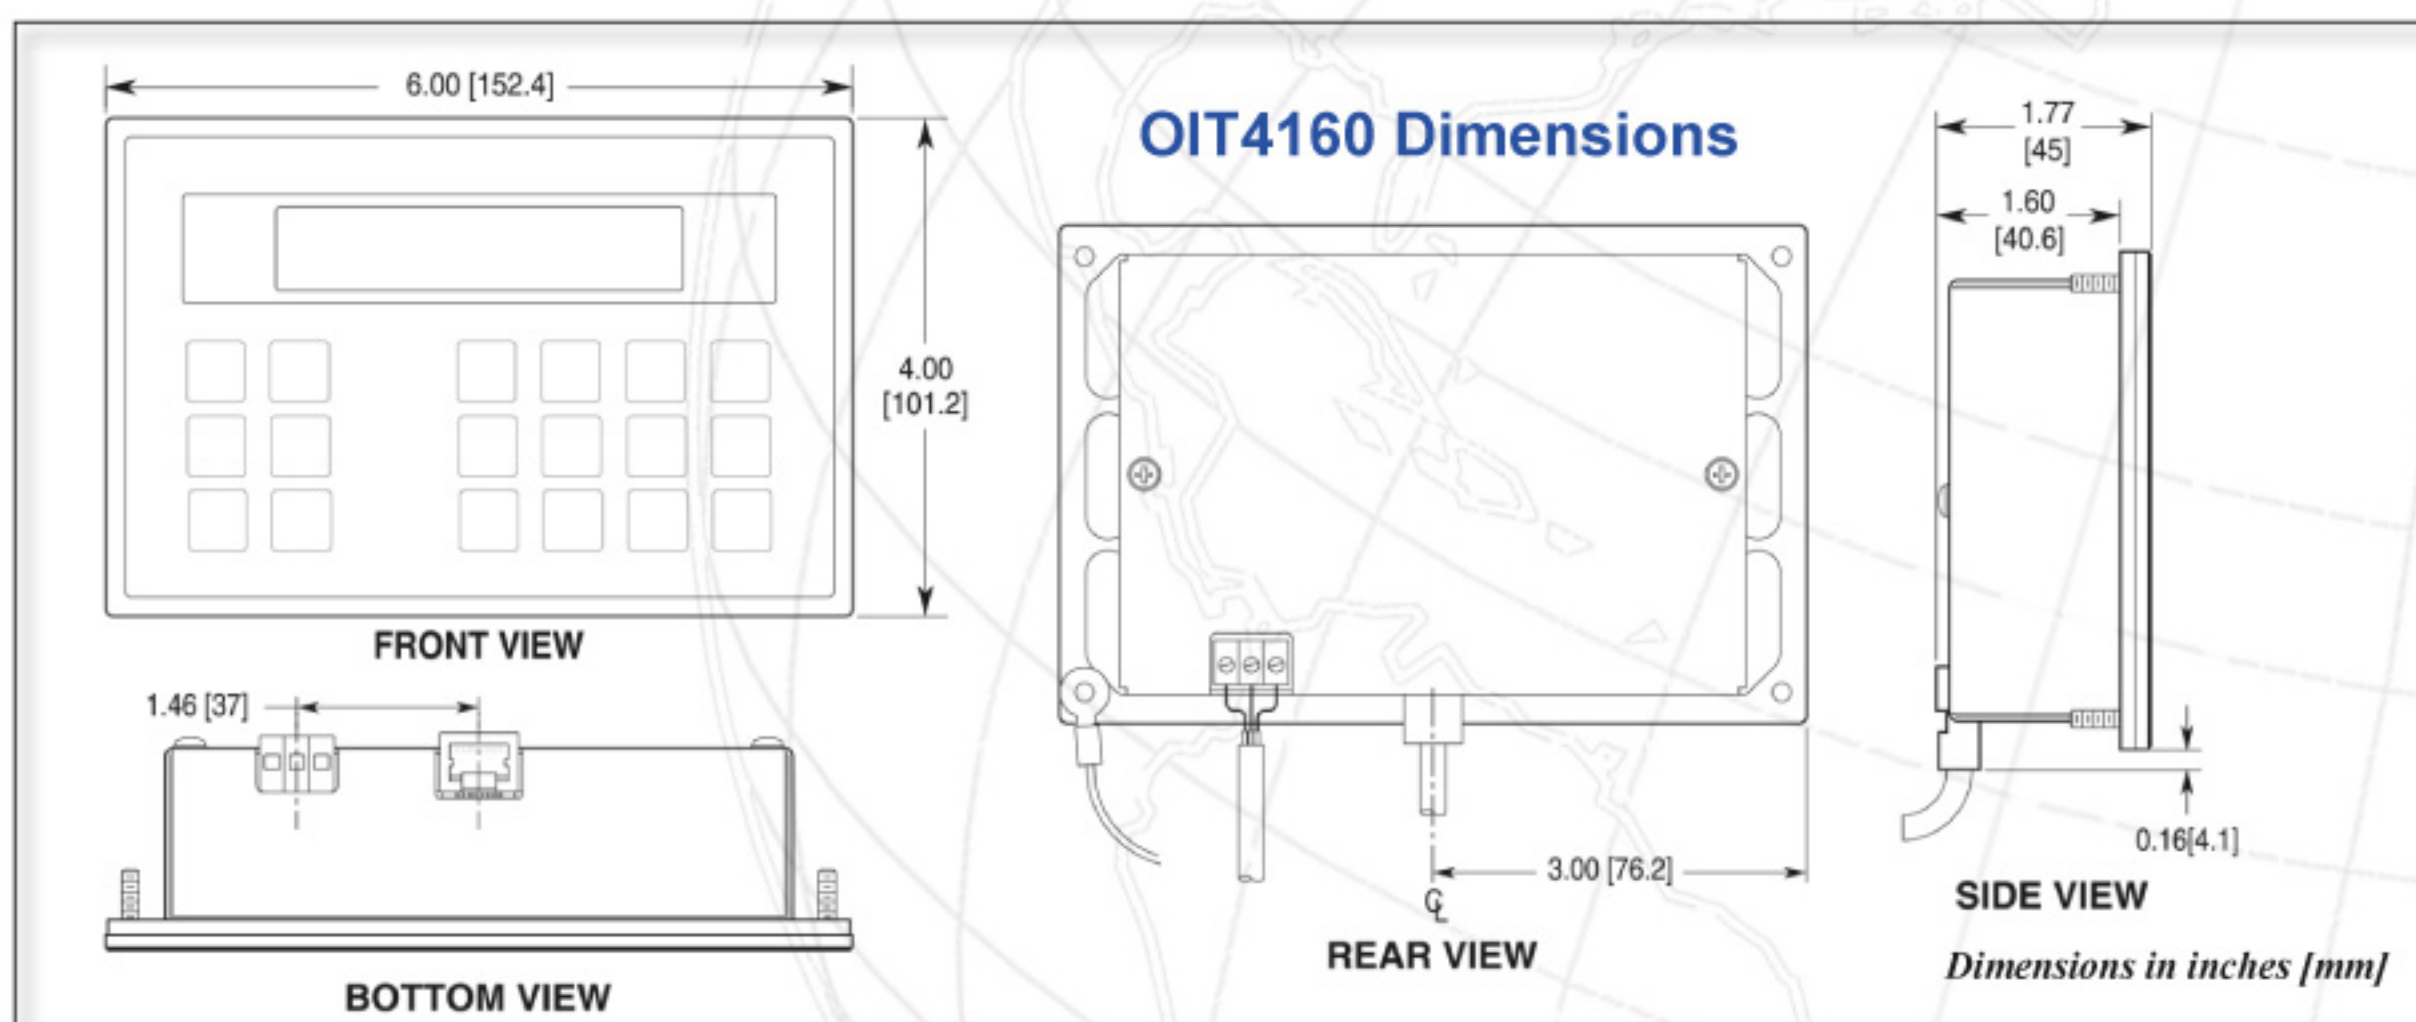

808 134th St SW, Suite 120
 Everett, WA 98204
 425.745.3229
 425.745.3429 (fax)
maple@maplesystems.com
www.maplesystems.com